SJ66 T
TELESCOPIC BOOM



STANDARD FEATURES

- EASYDRIVE™ Direction sensing drive and steer controls
- SKYCODED™ Colour coded and numbered wiring system
- Axle based 4WD
- Operator controlled locking rear differential and limited slip front differential
- Oscillating axle
- 50% Gradeability
- Drivable at full height
- Stage V Deutz TD2.2L Diesel engine
- Wet disc SAHR brakes (front and rear axle)
- Relay based control system
- Proportional controls
- Secondary guarding electrical (SGE)
- Overload sensing system
- Tilt alarm with drive cut-out
- 0.91 x 1.83 m Platform
- Modular platform railing system
- Lanyard attachment points
- Tri-entry sliding mid-rail
- Wiring for AC outlet on platform
- Swing out engine tray
- Swing up fiberglass cowlings
- Operator horn
- Hourmeter
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 15 x 19.5 Grip lug foam-filled tyres

ACCESSORIES AND OPTIONS

- Glazier kit
- Pipe rack
- Tool caddy
- Deutz D2011L04i Diesel engine (export only)
- Platform work lights
- Flashing light
- All motion alarm
- 0.91 x 2.44 m Platform
- Rear Gate
- Control box cover
- Auxiliary top rail (0.91 x 2.44 m platform only)
- 3.5 kW Generator (Includes hydraulic oil cooler)
- Hydraulic oil cooler
- Bio oil
- 1/2” Airline to platform
- Control box cover
- 385/65D19.5 Grip lug foam-filled non-marking tires
- ELEVATE telematics


† Standard lead times may be increased when optional equipment is added, consult factory.
‡ Capacities, and machine weights may differ when options are added.


CE
EU/ENG/03/2019

SJ66 T TELESCOPIC BOOM

Dimensions	SJ66T
Work Height	22.12 m
Platform Height	20.12 m
Horizontal Reach	17.37 m
Working Reach	18.02 m
A Platform Size	0.91 x 1.83 m
B Stowed Width	2.44 m
C Tailswing	1.19 m
D Stowed Height	2.57 m
E Transportation Height	3.30 m
F Stowed Length	10.34 m
G Transportation Length	8.13 m
H Wheelbase	2.44 m
I Ground Clearance	0.41 m

Specifications	SJ66T
Rotation	360° Continuous
Platform Rotation	170°
Jib Length	1.52 m
Jib Range +/-	+65° / -60°
Weight	12,800 kg
Gradeability	50%
Turning Radius (Inside)	2.82 m
Turning Radius (Outside)	5.05 m
Axle Oscillation	7.62 cm
Drive Speed (High speed)	7.2 km/h
Capacity	227 kg
Local Floor Load (With Rated Load)	1,140 kPa
Overall Floor Load (With Rated Load)	17.8 kPa
Maximum # of Persons	2
Tyre Type	Grip lug foam-filled
Tyre Size	15 x 19.5
Diesel Engine	44.5kw (60hp)
Fuel Tank Capacity	170 L
Hydraulic Reservoir	227 L

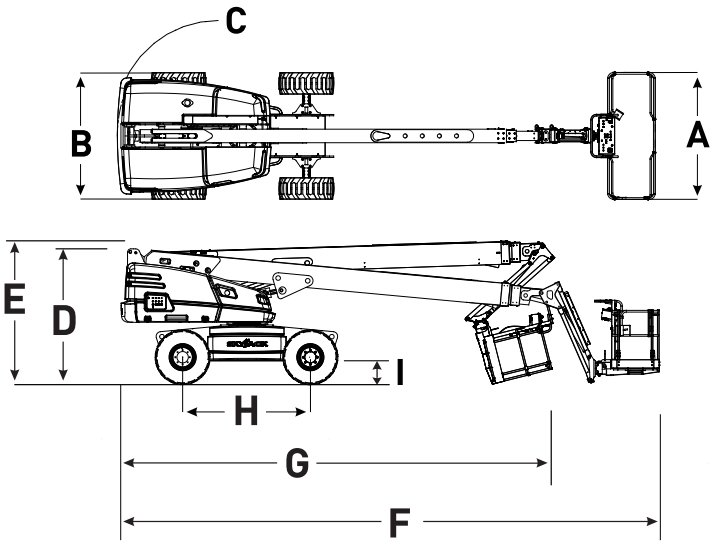

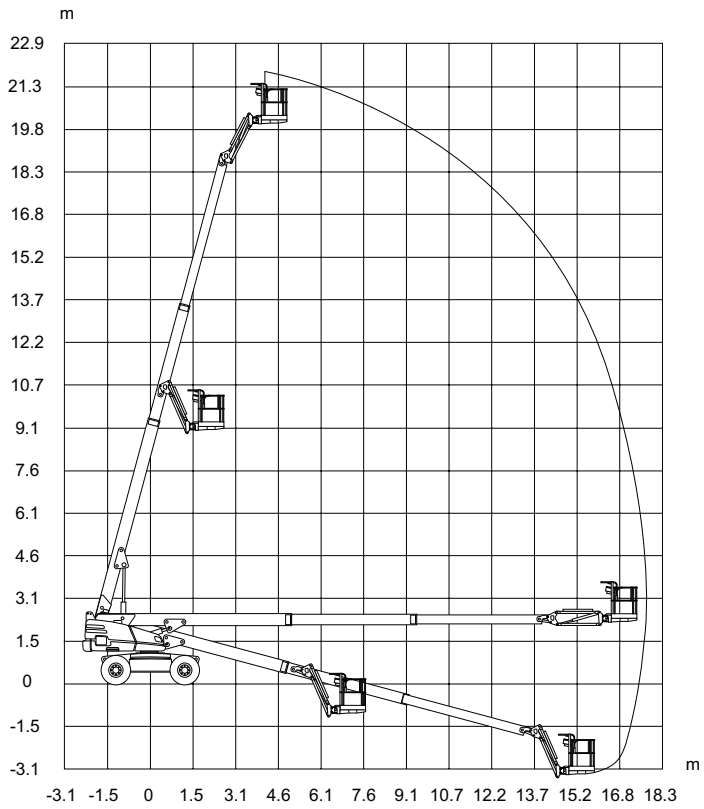

SJ66 T Work Height

Skyjack UK
Unit 1, Maes-y-Clawdd
Maesbury Road Industrial Estate
Oswestry, Shropshire, SY10 8NN
Tel: +44 1691 676235
Fax: +44 1691 676239
Email: info@skyjackeurope.co.uk

Skyjack SAS (France)
74 Rue Sibert
F-42400 Saint Chamond
France
Tel: +33 (0) 4 78 73 53 32
Tel: +33 (0) 4 78 73 05 68
Fax: +33 (0) 4 78 56 52 42

Skyjack Hebebühnen GmbH (Germany)
Därmannsbusch 2a
D-58456 Witten
Tel: +49 (0) 2302 20 26 909
Fax: +49 (0) 2302 20 25 671

Skyjack AB (Sweden)
Agnesbergsvägen 28
424 38 Agnesberg
Sweden
Tel: +46 (0) 31 21 22 45
Fax: +46 (0) 31 787 65 10

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC.

CE
EU/ENG/03/2019