




24m
22m
20m
18m
16m
14m
12m
10m
8m
6m
4m
2m
0m
−2m
−4m
−2m
0m
2m
4m
6m
8m
10m
12m
14m
16m
18m
20m

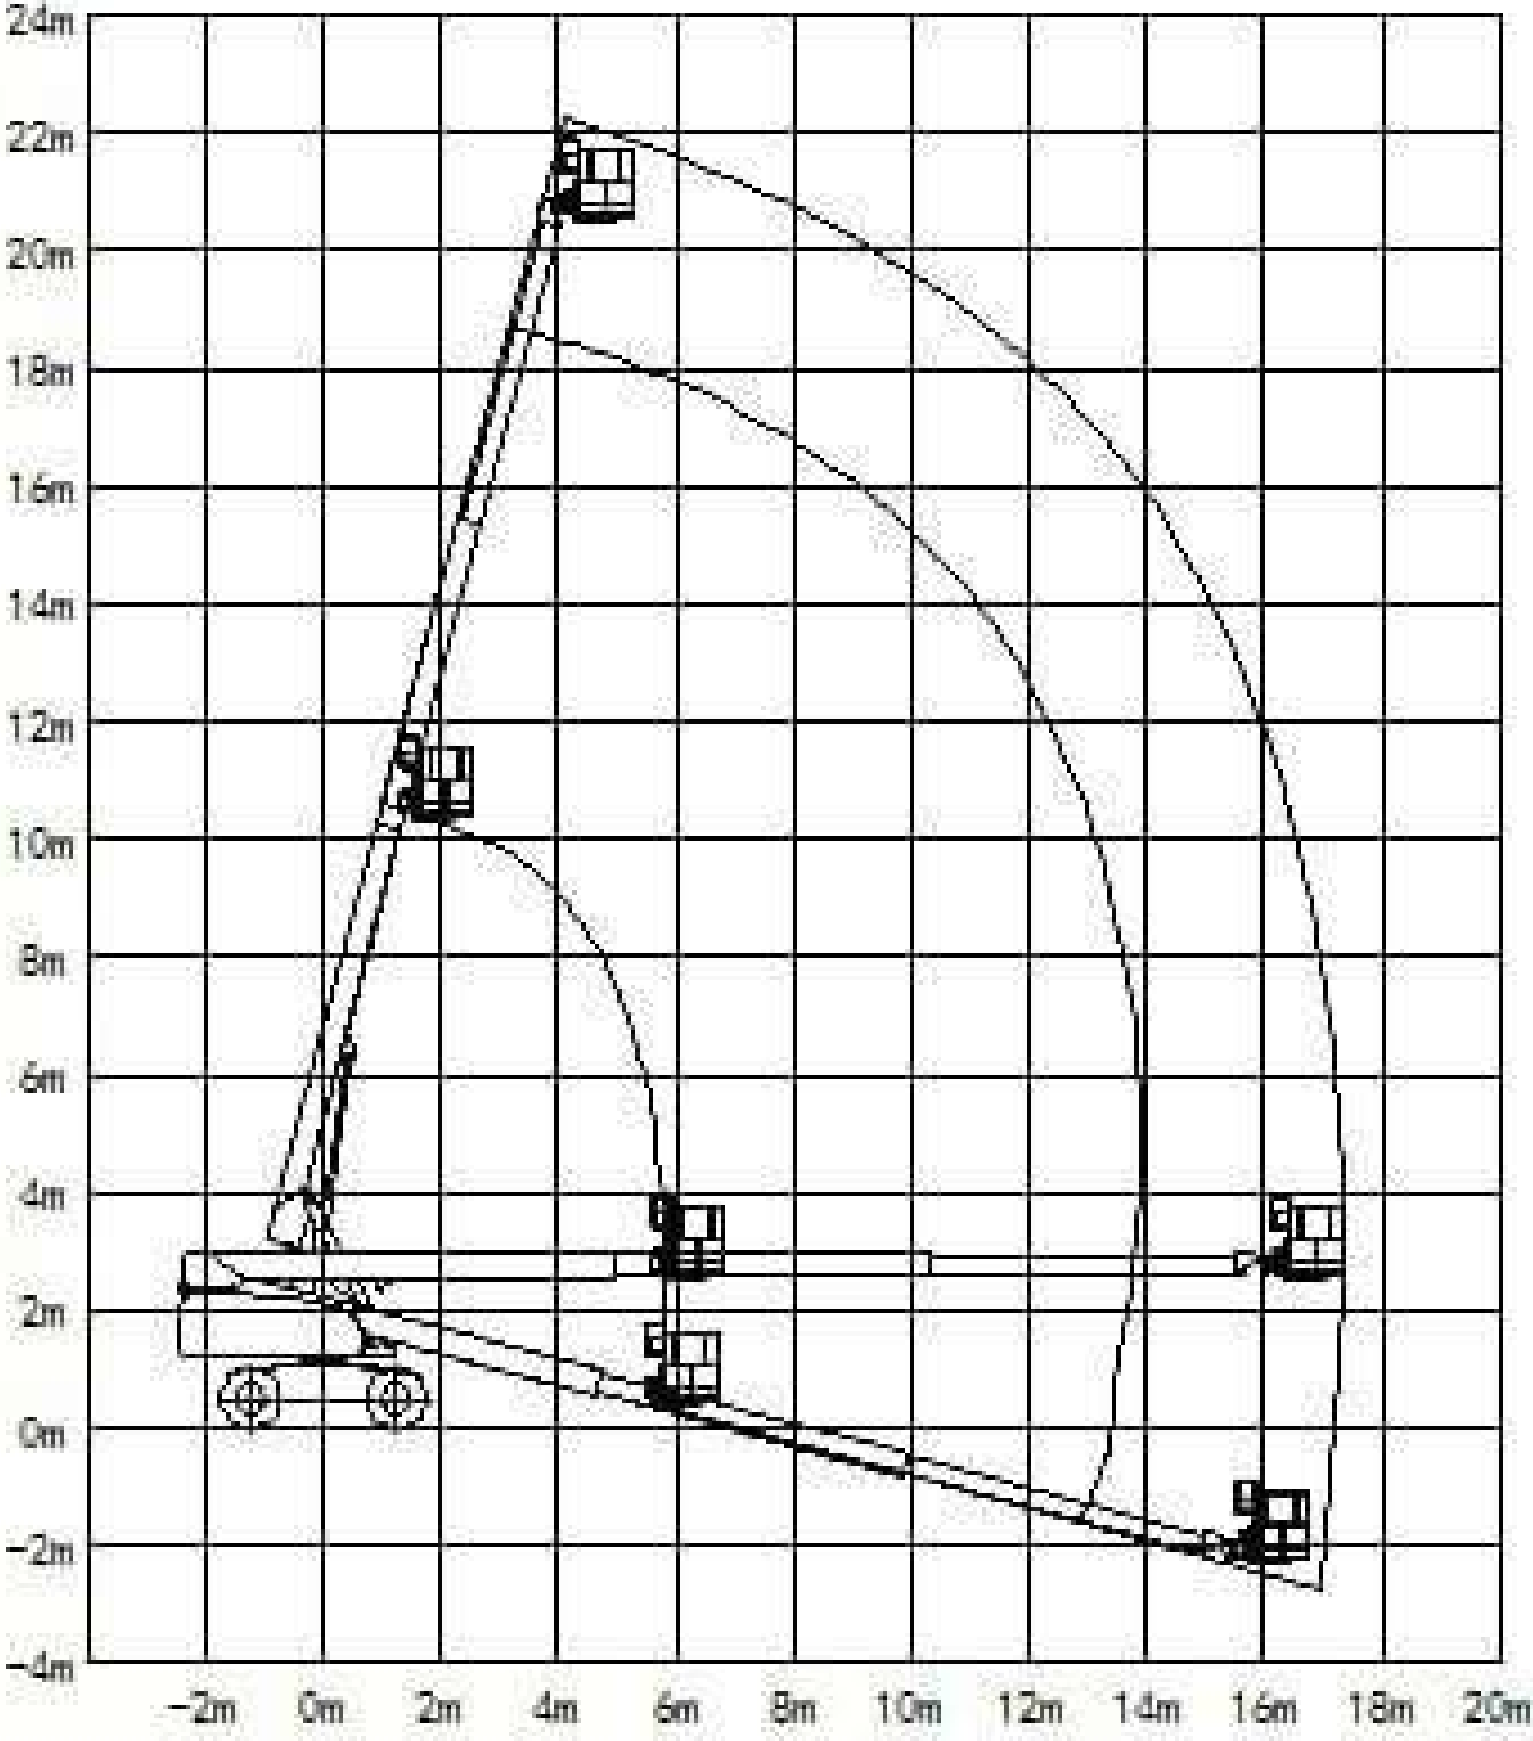

	GTBZ20S	GTBZ18S
A	9,20	8,34
A1	7,90	/
B	2,20	2,20
C	2,55	2,55
D	2,28	2,28
E	0,36	0,36

Model	GTBZ20
Dimensions	
Platform height	67 ft 6 in (20.6 m)
Working height	74 ft 1 in (22.6 m)
Horizontal outreach	56 ft 8 in (17.3 m)
Length (stowed)	30 ft 1 in (9.18 m)
Width (stowed)	8 ft 2 in (2.49 m)
Height (stowed)	9 ft 2 in (2.8 m)
Ground clearance	1 ft 5 in (0.45 m)
Wheel base	8 ft 2 in (2.49 m)
Size of platform (L*W*H)	4 ft 8 in *2 ft 8 in * 4 ft 1 in (1.45 m *0.85 m *1.24 m)
Performance Data	
Platform Capacity	2
Load capacity of platform	1060 lbs (480 kg)
Turntable rotation	360°
Platform rotation	160°
Driving speed (stowed)	0～4 mph (6.3 km/h)
Driving speed (raised)	0～0.7 mph (1.1 km/h)
Gradeability	30% (2WD) 45% (4WD)
Outside turning radius	16 ft 3 in (4.97 m)
Inside turning radius	5 ft 4 in (1.66 m)
Tail swing	4 ft 3 in (1.32 m)
Allowable slope	3°
Drive * steering	2 WD * 2 WS /4 WD * 2 WS
Tire size/type	9.00 - 20 / Solid
Engine	
Power source	diesel engine
Drive Type	Hydraulic pressure
Volume of hydraulic oil tank	160 L
Power	45 KW
Weight	
Overall weight	24284 lbs(11015 kg) - (2WD) 24438 lbs(11085 kg) - (4WD)
Standards compliant	CE、ISO、GOST

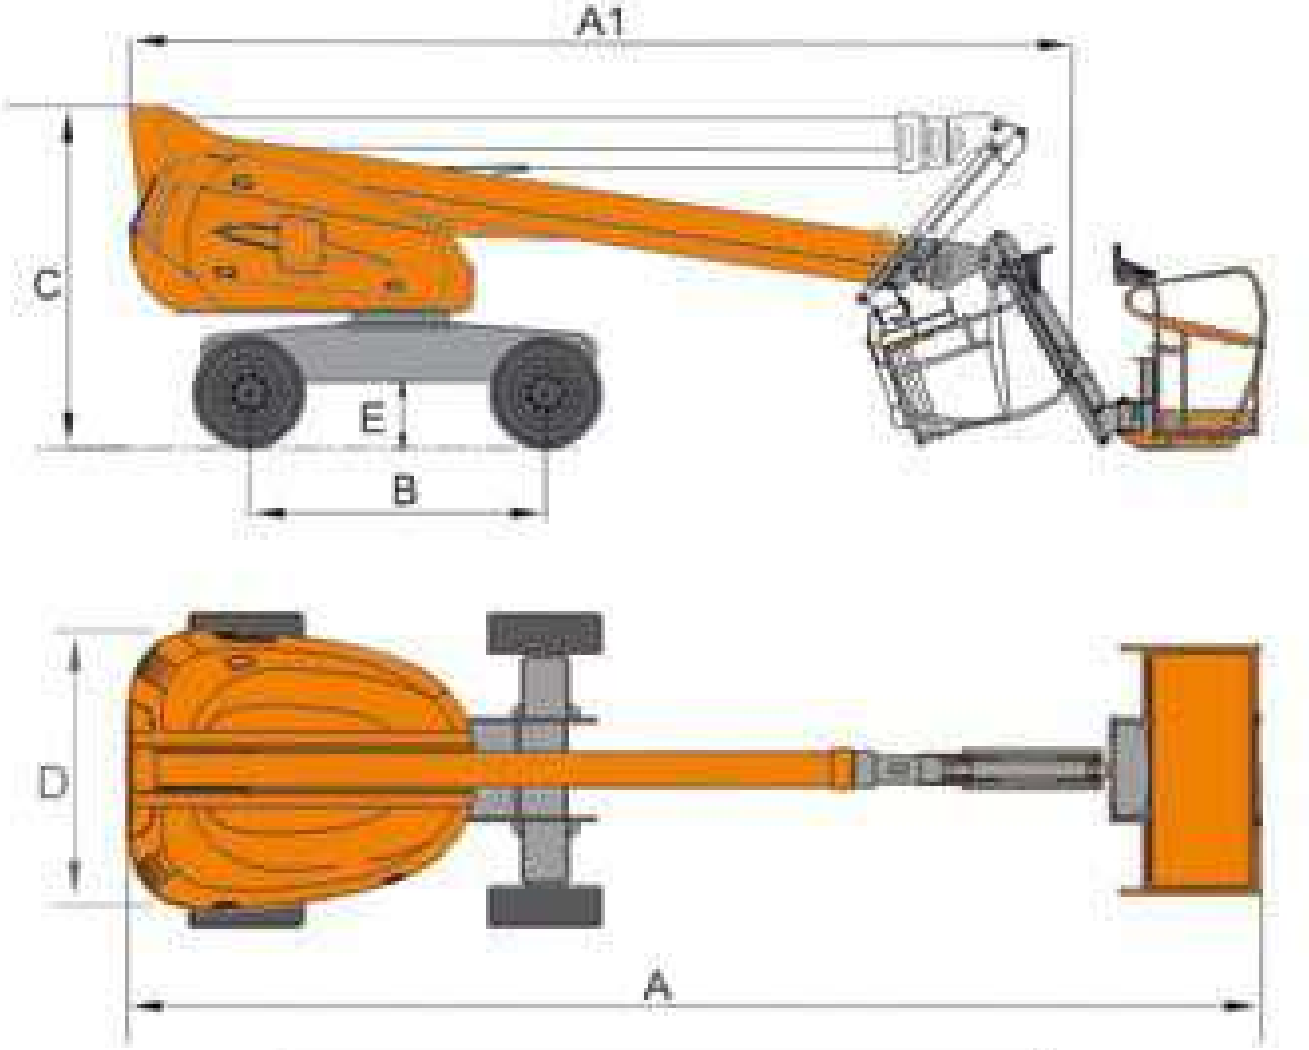