P 240 A *Smart*

PALFINGER


LIFETIME EXCELLENCE


THE BEST SOLUTION FOR EFFICIENT OPERATIONS IN TERMS OF PERFORMANCE, SIZE AND RELIABILITY




P 240 A Smart


WORKING DIAGRAMS

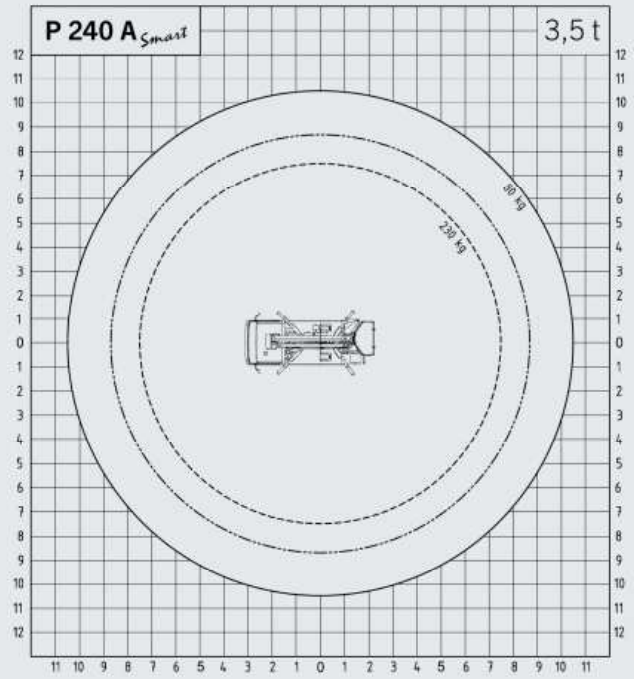

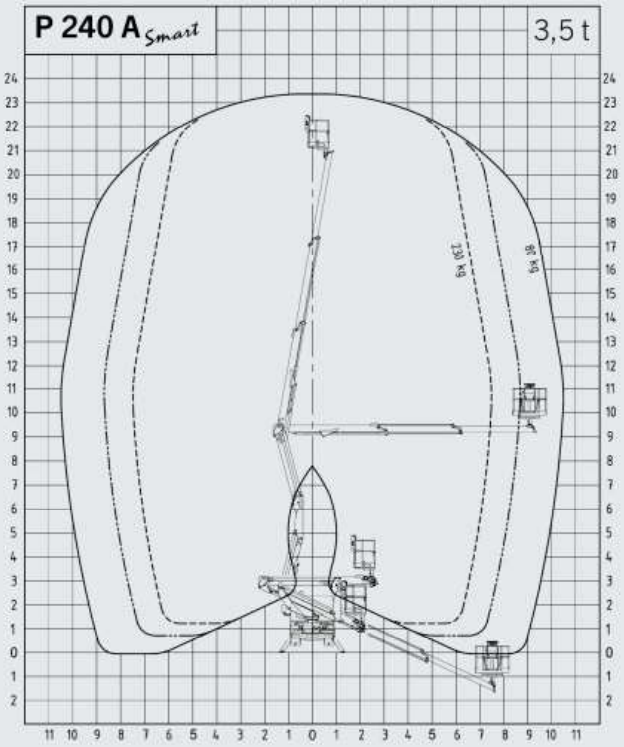

DIMENSIONS

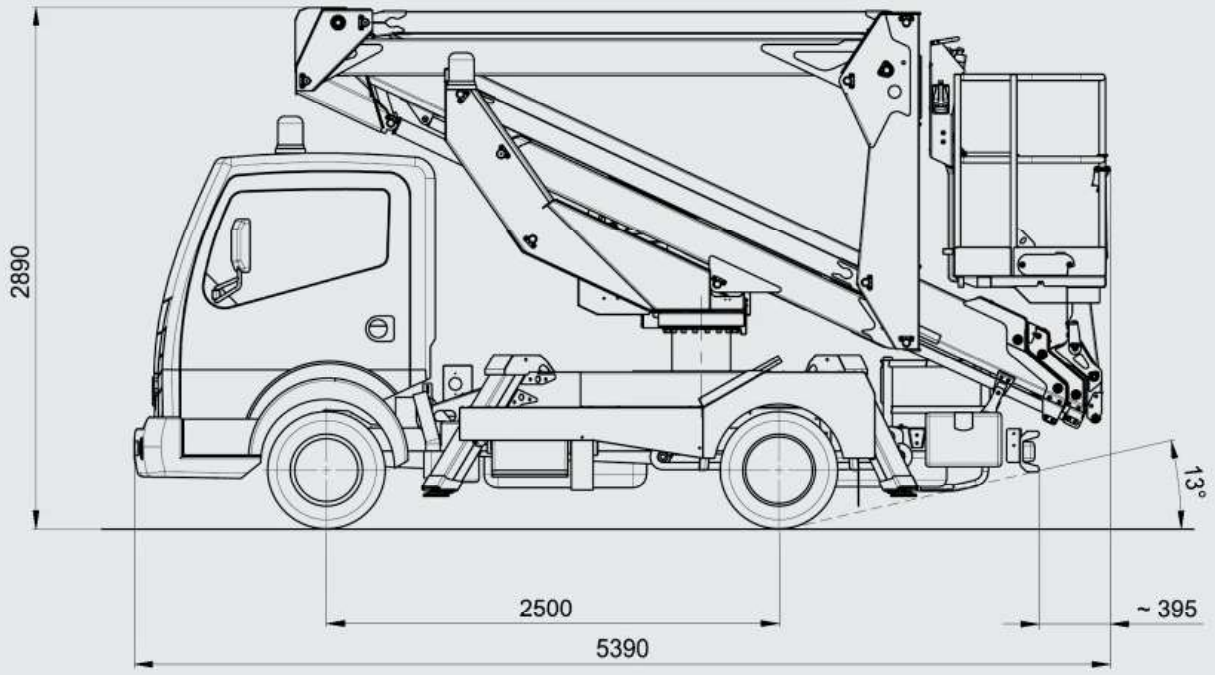



- Shortest machine in its class
- Small & clever for use in city centres
- Compact design and easy operation
- Fully hydraulic operation
- Ergonomic design
- Flexible access to heights thanks to combination of joint and telescope
- High manoeuvrability thanks to the extremely short wheelbase
- Safe working
- Professional PALFINGER quality

TECHNICAL SPECIFICATIONS

Max. working height	23.2 m
Max. basket bottom height	21.2 m
Max. outreach	10.2 m
Angle of main boom	-25° to + 80°
Rotation angle of turntable	370°
Rotation angle of basket	2 x 90°
Basket load	230 kg
Size of basket	1.4 x 0.85 x 1.1 m
Height in transport position	2.89 m
Width in transport position	2.1 m
Total length	5.39 m
Total weight	3350 kg

OPTIONAL

Fiberglass basket
Insulation 1000 V
Aluminium Side bars 200 mm
Electric motor 230 V
Working adjustable light 60 W on the basket
Customised paintwork boom

LIFETIME EXCELLENCE

THE RESULT IS PALFINGER ACCESS PLATFORMS FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. DEVELOPED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.

BETTER SOLUTIONS	BETTER EFFICIENCY	BETTER ERGONOMICS
HIGHER VALUE RETENTION		HIGHER AVAILABILITY
HIGHER SERVICEABILITY	BETTER ECOLOGY	MORE RELIABILITY

For further information please visit: www.palfinger.com/thebrand

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

KP-P240AL1+E/E 12/13, K 12/13, D 12/13